



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

10/509410

P 03 / U 1120

08.04.03

10 Rec'd PCT/PTC

23 SEP 2004

IP & S-DE zugestellt	
am	25. März 2003
Frist	

Bescheinigung

Certificate

Attestation

REC'D 02 MAY 2003

WIFO

PCT

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02007094.2

COMPLIANCE WITH RULE 17.1(a) OR (b)

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk

DEN HAAG, DEN  
THE HAGUE,  
LA HAYE, LE

19/03/03



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

**Blatt 2 der Bescheinigung**  
**Sheet 2 of the certificate**  
**Page 2 de l'attestation**

Anmeldung Nr.:  
Application no.:  
Demande n°: 02007094.2

Anmeldetag:  
Date of filing:  
Date de dépôt: 28/03/02

Anmelder:  
Applicant(s):  
Demandeur(s):  
Philips Corporate Intellectual Property GmbH  
20099 Hamburg  
GERMANY

Koninklijke Philips Electronics N.V.  
5621 BA Eindhoven

NETHERLANDS  
Bezeichnung der Erfindung:  
Title of the invention:  
Titre de l'invention:

Enhancement of brightness and contrast in images presented by a projection-based presenter

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:  
State:  
Pays:

Tag:  
Date:  
Date:

Aktenzeichen:  
File no.  
Numéro de dépôt:

Internationale Patentklassifikation:  
International Patent classification:  
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:  
Contracting states designated at date of filing:  
Etats contractants désignés lors du dépôt:

AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR

Bemerkungen:  
Remarks:  
Remarques:

THE APPLICATION WAS TRANSFERRED FROM THE ORIGINAL APPLICANTS:  
\* Philips Corporate Intellectual Property GmbH, Aachen - Germany  
\* Koninklijke Philips Electronics N.V., Eindhoven - Netherlands  
TO THE ABOVE MENTIONED APPLICANTS ON: 09.08.2002.

IP & S-DE zugestellt	
am	25. März 2003
Frist	

EPO - Munich  
22

28. März 2002

DESCRIPTION

Enhancement of brightness and contrast in images presented by a projection-based presenter

The invention relates to a method for enhancing brightness and contrast in images  
 5 provided by a projection-based presenter utilising a display panel illuminated by at least one scrolling band of light and a lamp as a light source for said at least one scrolling band of light. The invention relates equally to such a projection-based presenter.

Projection-based presenter, which project images e.g. onto a wall or a screen, are well  
 10 known from the state of the art for presenting video and/or still images. Such presenters can be realised as conventional CRT (cathode-ray tube) presenters, as conventional LCD (liquid crystal display) presenters, or as DMD (digital mirror device) presenters.

LCD and DMD presenters comprise a display panel with adjustable apertures, which are  
 15 usually arranged in a matrix of rows and columns. The display panel can be for instance a transmissive or a reflective LCD panel. Each aperture of the panel represents a pixel of an image that is to be projected. In an LCD-type panel the transmissivity of an individual aperture can be controlled continuously from fully transparent (white) to fully absorbing (black). The effective apertures are therefore adjusted by an image processor to  
 20 correspond to the brightness of the respective pixel in an image that is to be presented. In case of a digitally controlled display panel, which has only an on- or an off-state per aperture, a pulse-width-modulation principle is to be applied by the image processor. Thereby the aperture is switched open a more or less high fraction of the total time, while the switching frequency is higher than the bandwidth of the human eye.

25

In a conventional projection system, the light coming from the lamp is first separated by filters into the basic colours red, green and blue, supplied to three individual display panels providing the red, green and blue component of the coloured image and then

- combined again into the full image. Other so called time-sequential systems extract the red, green and blue light content from the lamp light in a sequence of time and provide the basic colours to a single display one after each other, while the repetition rate is sufficiently high not being perceived by the human eye. Common to both systems is that
- 5 all apertures of the display panels are illuminated at the same time.

- 
- In a scrolling colour presenter, in contrast, the display panel is exposed to bands of coloured light, moving vertically from top to bottom over the display panel. The moving bands of light can be provided for instance by a high-pressure gas discharge lamp via a
- 10 scanner. Such a scrolling projection-based presenter is a low-cost projection display solution, since it requires only a single display panel, similar to the time-sequential system, but produces a brighter image because of a higher utilisation of the white light coming from the lamp.

- 15 Common to all projection systems is, that the light is discarded which is not required at a specific image position.

- In all presenters, the brightness and the contrast of an image is a crucial performance indicator.

20

- From cathode-ray tube systems, a technology is known which allows displaying bright parts of a picture even brighter than occasioned by the picture, in case other picture parts are less bright, by an additional variation of the cathode ray intensity. This allows for natural images, more precisely for all non-blank-white images, an increase of the image
- 25 contrast. This is possible, because in a CRT system all image pixels are displayed sequentially. In a conventional LCD based system, such a feature cannot be provided, because all picture parts are projected at the same time.

- For scrolling colour systems, an adjustment of brightness of different image parts is not
- 30 known.

It is an object of the invention to enable an enhancement of the brightness and the contrast in images presented by a projection-based presenter which uses a display panel illuminated by scrolling light bands and a lamp as a light source for said scrolling light bands.

5

The object is achieved according to the invention with a method which comprises modulating the light output of the lamp of the presenter between different scrolling positions in a way that a higher light intensity is supplied by the lamp when parts of the display panel currently representing brighter parts of a respective image are illuminated  
10 by said at least one scrolling band of light than when parts of the display panel currently representing less bright parts of said image are illuminated by said at least one scrolling band of light.

The object is equally achieved according to the invention with a projection-based  
15 presenter utilising a scrolling display, which presenter comprises means for carrying out the steps of the proposed method.

The invention proceeds from the consideration that in most cases the image performance of a display scrolling projection-based presenter can be improved significantly, in case  
20 the light output of a lamp of a presenter is modulated such that brighter image parts are supplied with a higher light intensity than other parts of the image.

It is an advantage of the invention that in a non-blank-white picture a higher peak intensity is achieved as compared to a conventional presenter, and thus at the same time  
25 an increase in the maximum contrast in an image.

Preferred embodiments of the invention become apparent from the dependent claims.

In case the presenter employs a display panel with adjustable apertures representing  
30 different pixels of the displayed image, preferably the effective apertures are controlled at

the same time such that a non-distorted brightness reproduction is maintained. It is to be noted that the term adjustable aperture is employed here as a general term for any means of a display panel enabling for a given illumination an adjustment of the brightness for a specific pixel of an image that is to be displayed, as described e.g. above with reference  
5 to LCD display panels and digitally controlled display panels.

---

Advantageously, the average power supplied to the lamp for adjusting the light output is maintained constant for all images. This can be achieved by decreasing the power and thus the output light for less bright image parts, whenever the power and thus the output  
10 light is increased for brighter image parts. Thus, the required average power does not have to be increased in order to obtain brighter image parts.

In case the presenter employs a display panel with adjustable apertures representing different pixels of the displayed image, it is proposed that the effective size of the  
15 apertures of a display panel for the dark image parts is increased, in order to avoid that the darker parts are displayed darker than previously due to the decreased output light and thus a distortion of the reproduction of the greyscale or the colour reproduction. In a preferred embodiment of the invention, the maximum aperture in every horizontal line of the display panel is adjusted to an opening of 100%, since this results in the maximum  
20 efficiency in exploiting the available light intensity.

In a preferred embodiment of the invention, the lamp employed for supplying the required luminance for the scrolling display is a high-pressure gas discharge lamp, e.g. a UHP (ultra high performance) lamp. Such lamps have the capability to react rapidly to a  
25 change of the provided power. The rather short time constant of the lamp is determined by the employed high temperature plasma. A high pressure gas discharge lamp is further able to provide an increased light output for a short time without negative effects, i.e. without stressing the lamp body thermally overmuch, as long as the rated power, which is an average power allowed for a long-term operation of the lamp, is not exceeded. The  
30 average power used by the presenter can therefore be set close to the maximum value

that is acceptable for a long-term operation of the lamp, thereby ensuring that a maximum brightness can be achieved.

Most natural images show a distinct vertical brightness profile, indicating that the world  
5 appears basically to be flat. Moreover, known scrolling presenters usually employ a vertical scrolling. In an advantageous embodiment of the invention, the brightness is therefore adjusted for each horizontal line in a vertically scrolling presenter.

The employed display panel can comprise in particular adjustable apertures arranged in a  
10 matrix of rows and columns. Preferably, changing fractions of the rows are then illuminated by the at least one scrolling band of light, i.e. each scrolling band of light may illuminate one or more, but not all of the rows at a time.

The presenter can be in particular a video- and data presenter using either a front  
15 projection or a rear projection.

In the following, an embodiment of the invention will be described in more detail by way of example with reference to the accompanying drawings of which

- 20 Fig. 1 is a block diagram of a first projection system comprising an embodiment of a projection-based presenter according to the invention;  
Fig. 2 is a flow chart illustrating an embodiment of the method according to the invention implemented in the presenter of figure 1;  
Fig. 3 is a diagram showing the typical brightness profile of an image;  
25 Fig. 4 is a diagram showing an optimised lamp power profile generated with the method according to the invention based on the brightness profile of figure 3; and  
Fig. 5 is a block diagram of a second projection system comprising an embodiment of a projection-based presenter according to the invention in combination with a scrolling colour separation.

Figure 1 shows a first presentation system, which comprises a projection-based presenter according to the invention.

The presenter comprises a power supply 1 which is connected via a lamp power  
5 regulator 2 to a UHP high-pressure gas discharge lamp 3. The presenter further  
comprises a display panel 5 with a plurality of adjustable apertures arranged in a matrix,  
consisting of rows and columns. A scanner 4 is arranged between the UHP lamp 3 and  
this display panel 5. On the side of the display panel 5 opposite to the scanner 4, in  
addition a lens 6 is provided. The presenter moreover comprises an image controller 8,  
10 one output of which is connected to a control input of the lamp power regulator 2. A  
second output of the image controller 8 is finally connected to the display panel 5.

A data input of the image controller 8 is connected to an output of an image source 9,  
e.g. of a DVD player. Finally, a screen 7 is provided at some distance in front of the lens  
15 6 of the presenter.

The functioning of the presenter of figure 1 will be described in the following.

The power supplied by the power supply 1 is controlled by the lamp power regulator 2  
20 to establish a desired electrical power in the lamp 3, and thus, a desired lamp brightness.

The light emitted by the UHP lamp 3 is directed by a reflecting shield of the lamp to the  
scanner 4. The scanner 4 directs the light from the lamp to the display panel 5 in a way  
that it illuminates the panel 5 with a stripe of light scrolling from top to bottom over the  
25 display panel 5.

The light passing the apertures of the display panel 5 is projected via the lens 6 onto the  
screen 7 such that the image is displayed on the screen 7 in form of a band moving from  
the bottom to the top of the screen 7. Depending on the design of the projection system  
30 the movement of the bands on the panel and on the screen can also be reverse.



The effective size of the respective apertures of the display panel 5 is adjusted by the image controller 8. The image controller 8 receives image data for images that are to be displayed on the screen 7 from the image source 9. Based on the received data, the image controller 8 determines the required size of the apertures of the display panel 5 for each colour in each vertical line.

The processing performed by the image controller 8 for determining the size for all apertures and additional processing performed by the image controller 8 according to the invention is illustrated in figure 2.

10

In this processing, the image controller 8 first analyses the profile of the maximum brightness of the received image. More specifically, it detects the maximum brightness in each horizontal line of the image. A typical brightness profile of an image with about 350 horizontal lines is depicted in the diagram of figure 3. A first curve 31 in the diagram indicates the maximum pixel brightness in each horizontal line. A second curve 32 in the diagram indicates the minimum pixel brightness in each horizontal line. A third curve 33 in the diagram finally indicates the average pixel brightness in each horizontal line.

The maximum pixel brightness in each horizontal line determines in conventional methods the maximum aperture required for the corresponding row of the display panel 5 when assuming a light intensity achieved with the rated lamp power supplied to the UHP lamp 3. The other apertures are adapted according to the brightness for the respective other pixels.

The image controller 8 of the presenter according to the invention, in contrast, sets the apertures of the display panel 5 by a corresponding control signal such that in each row, the maximum aperture is 100%, while the other apertures are adapted accordingly.

For those rows of the display panel 5, in which the apertures were increased to achieve a maximum aperture of 100%, the average light intensity of the UHP lamp 4 is no longer

required for achieving the required maximum brightness. Thus, it is possible to reduce the lamp power for these rows, resulting in an increased light efficiency. The saved power can be used instead for brighter horizontal lines of the image.

- 5 The image controller 8 therefore determines for each row of the display panel 5 the lamp power resulting in the required maximum brightness in this row with a fully opened aperture. For those rows, which had already initially the highest aperture, a higher-lamp power than the average is used, resulting in an average lamp power equal to the rated power of the lamp but also in a brighter image projection in this part of the picture.

10

- The determined decreased or increased power for all horizontal lines of one image form a lamp power profile, which is forwarded by the image controller 8 to lamp power regulator 2. A corresponding lamp power profile, which was determined based on the brightness profile of figure 3, is depicted in the diagram of figure 4. The diagram shows  
15 an optimised power profile for the case that the maximum pixel aperture is 100% in each of about 350 rows. A first curve 41 indicates the lamp power determined for all rows. The lamp power is normalised with the maximum lamp power used, i.e. the maximum lamp power corresponds to a value of 1. A second curve 42 indicates the maximum aperture in each of the about 350 rows. The value of 1 represents for this curve 42 an  
20 aperture of 100% selected for all maximum apertures.

- The lamp power profile determined by the image processor 8 is sent to the lamp power regulator 2, which adjusts the power supplied to the lamp 3 for each row accordingly. The UHP lamp 3, which reacts rapidly to the changed power settings, is thus able to emit  
25 for each row of the display panel 5 a light of an individual intensity. Practically, the maximum pixel brightness is each horizontal line of the displayed image is now determined by the lamp power. The profile of the maximum pixel excitation results then in a maximum value of 1 (white) for each horizontal line.

30

Figure 5 shows a second presentation system, which comprises a projection-based presenter according to the invention. The structure of this second presentation system is the same as the structure of the first presentation system depicted in figure 1, and corresponding components were provided with the same reference signs.

5

In the second presentation system, though, the light band is subdivided by the scanner 4 into three stripes of different colours. In this case, therefore also the spatial distribution of the coloured bands and the colour content of the image have to be considered instead of the pure brightness when determining the power profile for the lamp power. The strategy however remains the same, i.e. maximising the pixel aperture by compensating with the lamp power.

10

The described embodiments of the invention are thus based on a fast power setting signal fed to the lamp power supply, the image processor producing this signal according to the brightness profile of an image that is to be projected.

15

As a result of the described power and aperture control, the peak intensity of the projected non blank-white image is increased compared to the peak intensity achieved with a conventional presenter, while the average lamp power remains the same.

20

Investigations have produced a gain in contrast and peak-brightness of between 10% and 100%, with an average improvement of approximately 40% for a wide range of different picture content.

It is understood that the described embodiment of the invention represents only one of a great variety of possible embodiments of the invention.

25

EPO - Munich  
22

28. März 2002

CLAIMS

- 
1. Method for enhancing brightness and contrast in images provided by a projection-based presenter utilising a display panel (5) illuminated by at least one scrolling band of light and a lamp (3) as a light source for said at least one scrolling band of light, wherein said method comprises modulating the light output of said lamp (3) between different  
5 scrolling positions in a way that a higher light intensity is supplied by said lamp (3) when parts of said display panel (5) currently representing brighter parts of a respective image are illuminated by said at least one scrolling band of light than when parts of said display panel (5) currently representing less bright parts of said image are illuminated by said at least one scrolling band of light.
- 10 2. Method according to claim 1, wherein the average light intensity over time supplied by said lamp (3) for an entire image is kept constant.
3. Method according to claim 1 or 2, wherein said projection-based presenter utilises at  
15 least one vertically scrolling band of light, and wherein the light intensity supplied by said lamp (3) is adjusted for each horizontal line.
4. Method according to one of the preceding claims, wherein said display panel (5) is illuminated by three scrolling bands of light of different colours.
- 20 5. Method according to one of the preceding claims, wherein said light output of said lamp (3) is modulated by varying the power supplied to said lamp (3).

6. Method according to one of the preceding claims, wherein said display panel (5) comprises adjustable apertures arranged in a matrix of rows and columns, and wherein changing fractions of said rows are illuminated by said at least one scrolling band of light.

5

7. Method according to claim 6, wherein the maximum aperture in each of said rows is adjusted to 100%, and wherein the other apertures of each of said rows are adapted such that a non-distorted brightness reproduction is maintained in each row.

10 8. Method according to claim 6, comprising:

- determining the maximum brightness of an image that is to be projected in each scrolling position;
- adjusting the apertures of said display panel (5) for each scrolling position in accordance with said image in a way that the maximum aperture is 100%;
- 15 - determining for each scrolling position the relative power which has to be provided to said lamp (3) for achieving said determined maximum brightness with said maximum aperture of 100% while maintaining the relation to the brightness of the other image parts;
- scaling the overall power level such that the average power of the lamp corresponds
- 20 to a rated power level.

9. Projection based presenter utilising a display illuminated by at least one scrolling band of light, which presenter comprises means (2,3,4,5,6,8) for carrying out the steps of one of the preceding claims.

25

10. Projection based presenter according to claim 9 comprising

- a display panel (5) with adjustable apertures arranged in horizontal lines;
- a lamp (3) for providing light for a projection;
- power supply means (1,2) for providing said lamp (3) with an adjustable power;
- 5 - a scanner (4) for directing said light output by said lamp (3) to said display panel (5)  
in subsequent horizontal bands;
- a lens (6) for projecting an image provided by said display panel (5); and
- an image processor (8) for receiving an image that is to be projected and for  
controlling the power supply (2) to said lamp (3) and the size of said adjustable  
10 apertures of said display panel (5) according to a received image.

11. Projection based presenter according to claim 9 or 10, wherein said lamp is a high-pressure gas discharge lamp (3).

28. März 2002

ABSTRACT

Enhancement of brightness and contrast in images presented by a projection-based presenter

The invention relates to a method for enhancing brightness and contrast in images provided by a projection-based presenter utilising a display panel 5 illuminated by at least one scrolling band of light and a lamp 3 as a light source for said at least one scrolling band of light. In order to enable such an enhancement, it is proposed that the method comprises modulating the light output of the lamp 3 between different scrolling positions in a way that a higher light intensity is supplied by said lamp 3 when parts of the display panel 5 currently representing brighter parts of a respective image are illuminated by said at least one scrolling band of light than when parts of the display panel 5 currently representing less bright parts of said image are illuminated by said at least one scrolling band of light. The invention relates equally to a corresponding projector.

15 Fig. 2

EPO - Munich  
22  
28. März 2002

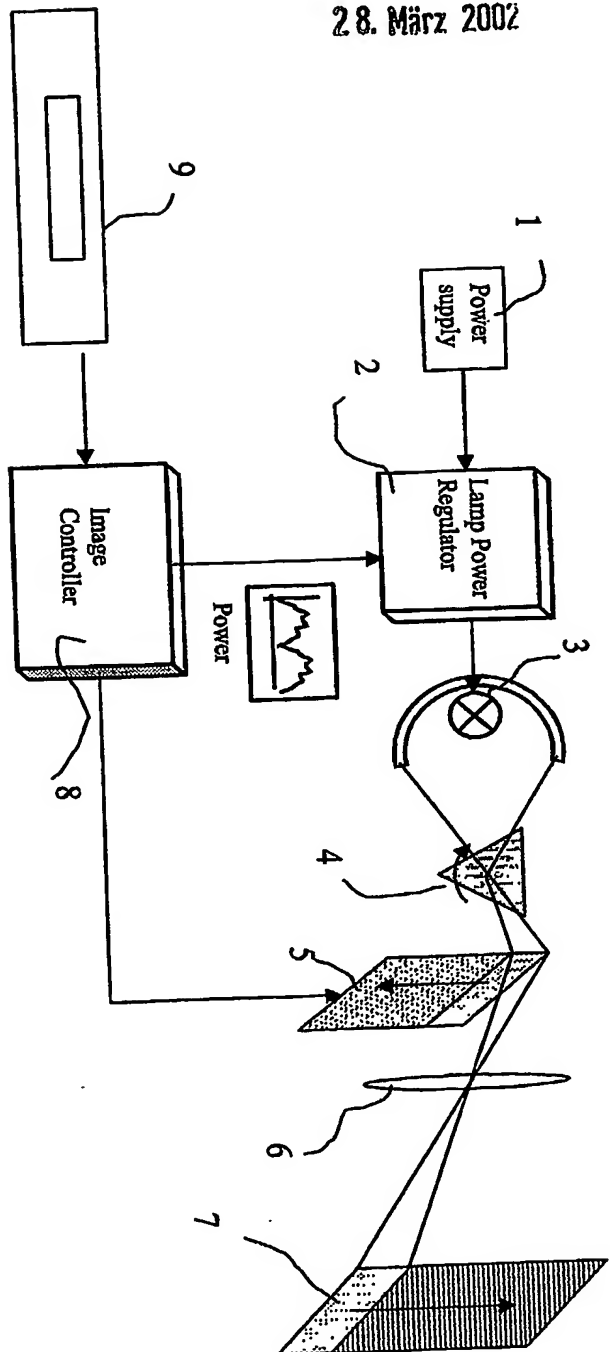


FIG. 1



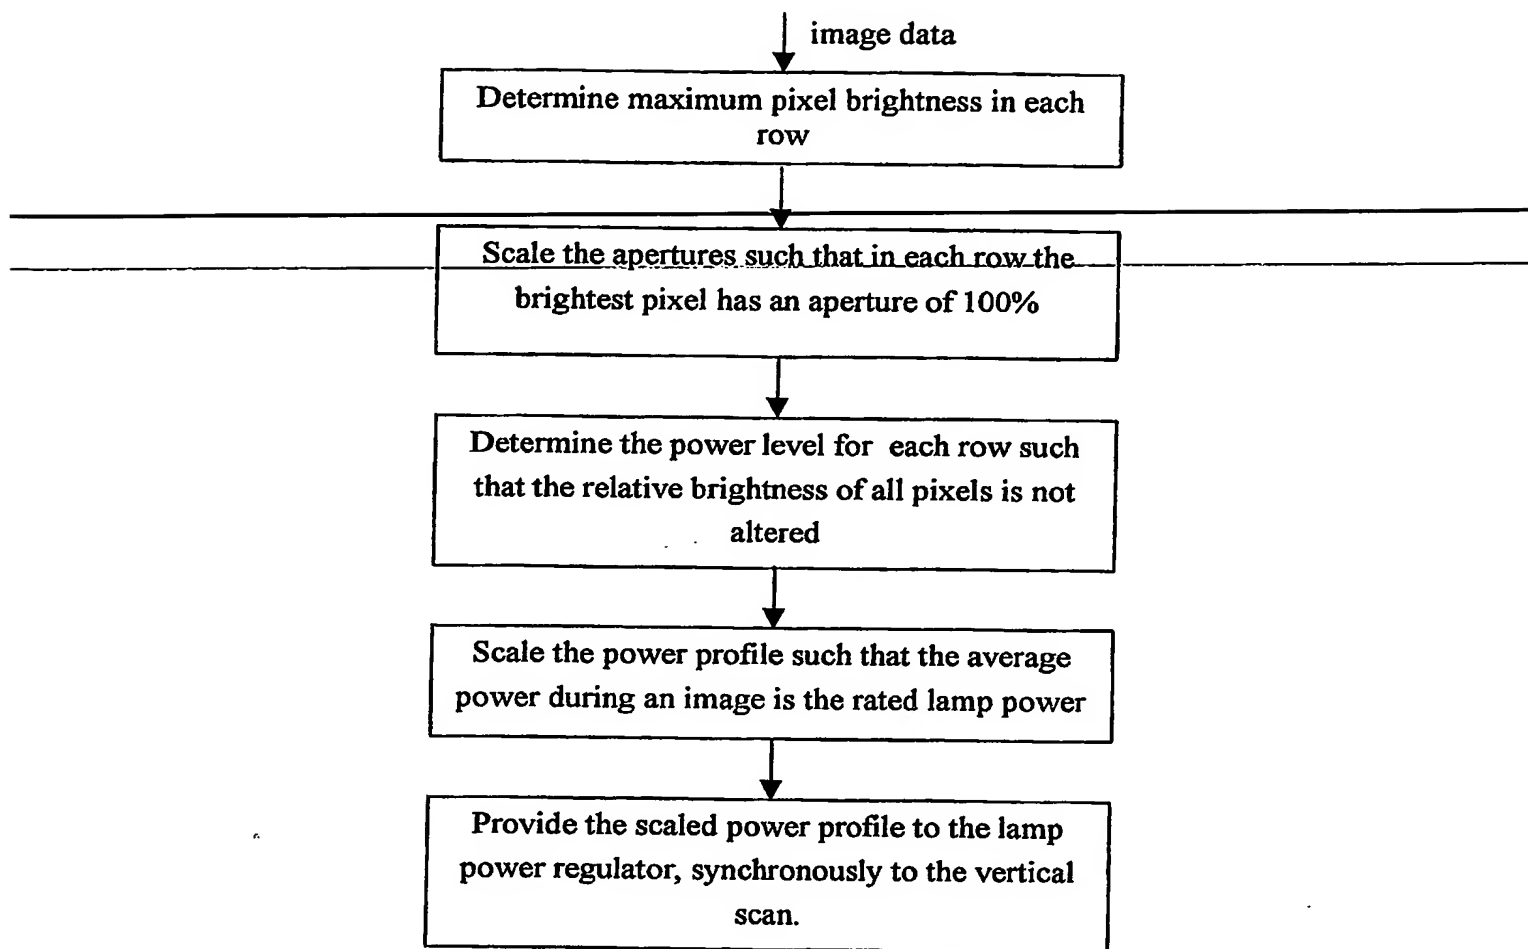


FIG. 2

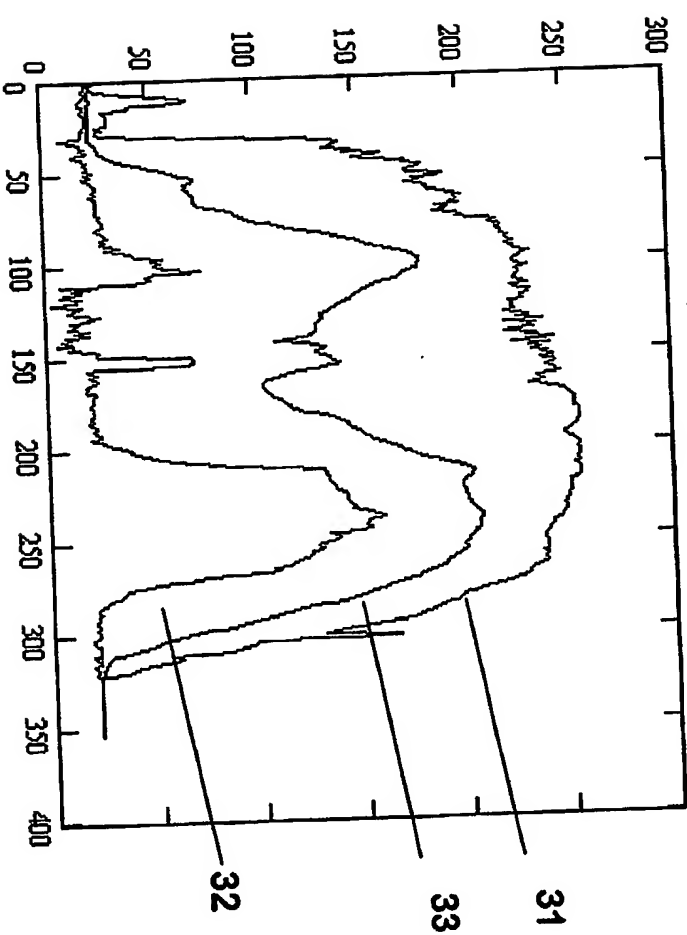


FIG. 3

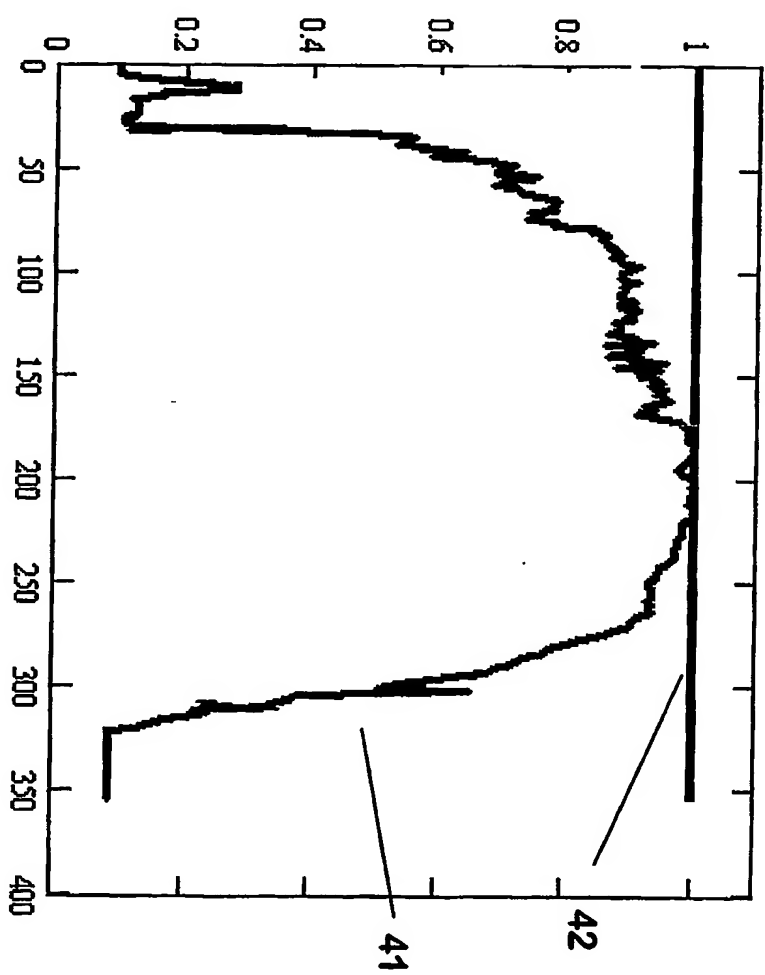


FIG. 4

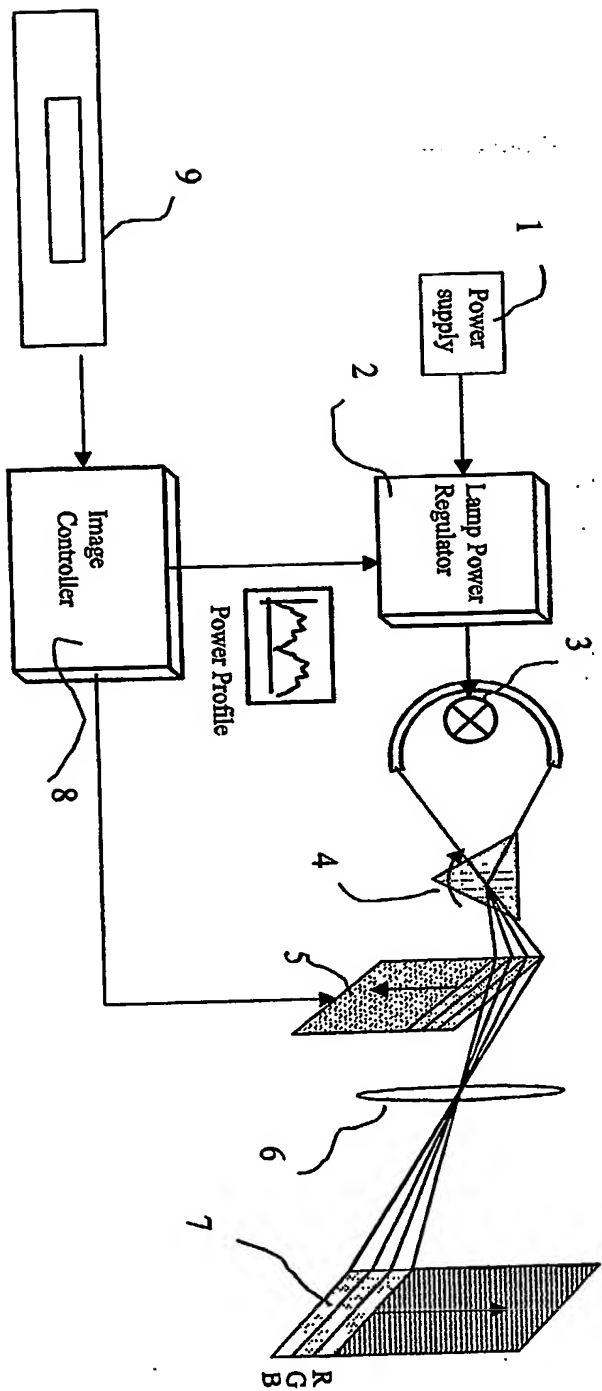


FIG. 5